

AUDIO INTEGRATED UNITS MMB GmbH © 2014

Gez.	Datum	Name	Maßstab
	01.08	Guersan	1:1,25

T9216C



Kommandosprechstelle

19"-1HE Sprechstelle 61mm Tief

Transformator, smmetrische Ein- und Ausgänge +6dBu.
Mikrofonbegrenzerverstärker.

Kopfhörerausgang mit eigenem Regler

Max. Leistung an Lsp. 0,5W.
Lautsprecherdämpfung ca. -20dB.

Ein-Ausgänge

Max. Eingangspegel	+14dBu	
Max. Ausgangspegel	+6dBu (Intern Begrenzt)	Fronttrimmer zur Anpassung
Eingangswiderstand	> 10k-Ohm	
Ausgangswiderstand	50-Ohm	

GPI T9216

DIM-CUT	Eingang	D-Sub. 9pol. Female Pin 1 / CUT Pin 2 / DIM Pin 5 / Bezug (GND)
---------	---------	--

Spannungsausgang 5V für Ext. Beschaltung

3 x RJ45	Pin 1,2 / +5V Pin 3,6 / 0V
----------	-------------------------------

Max. Strom	2A
------------	----




Product Information

This document contains information for a adis product.
MMB GmbH reserves the right to modify this product without notice.

MMB GmbH

Kleine Twiete 72, 25436 Uetersen
Tel. 04122-9790321 Fax. 9790329
info@mmb-units.de

Copyright © MMB GmbH 2013
(All Rights Reserved)

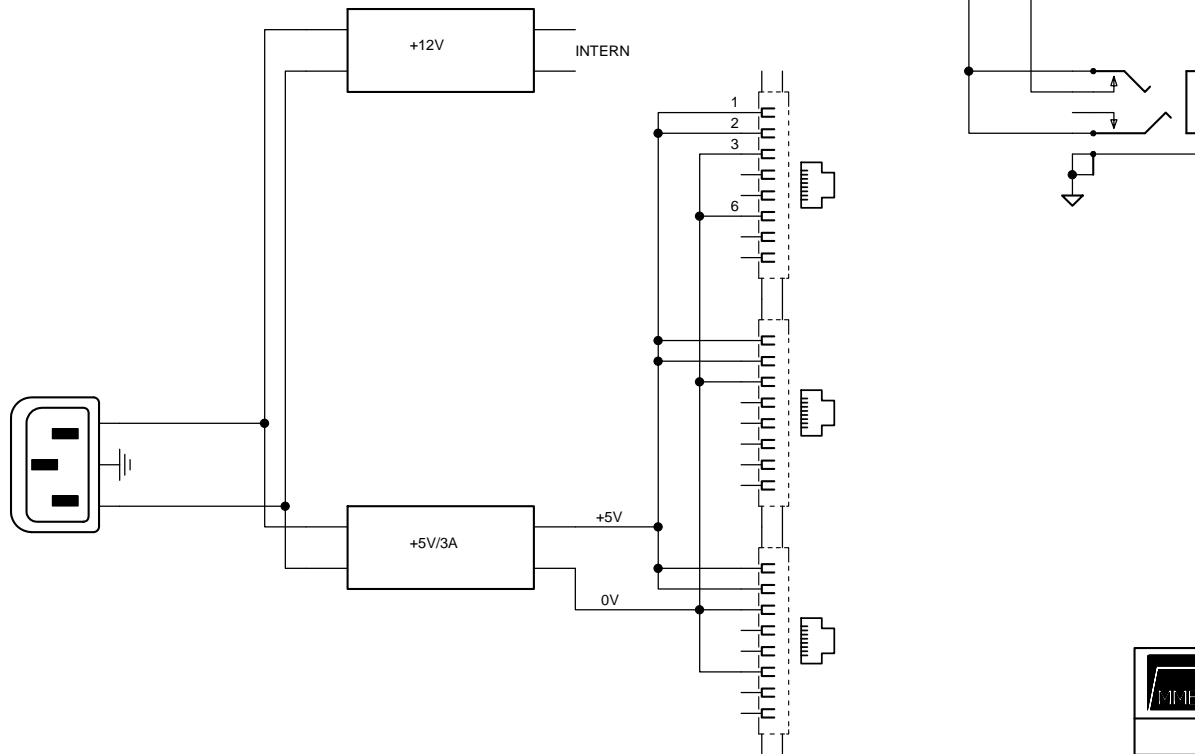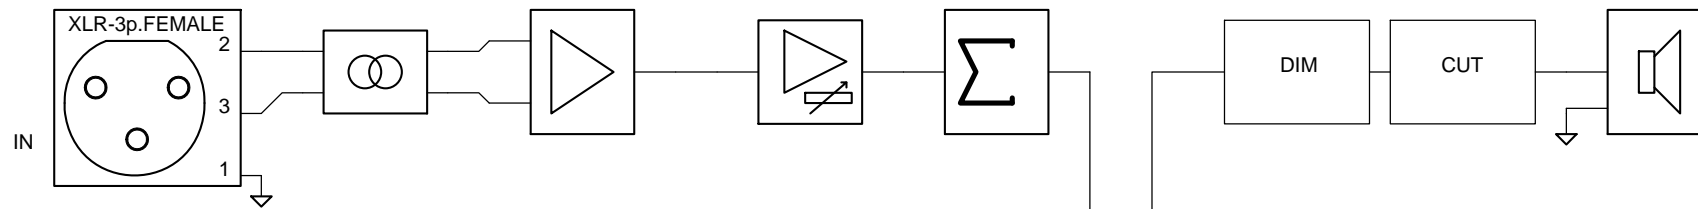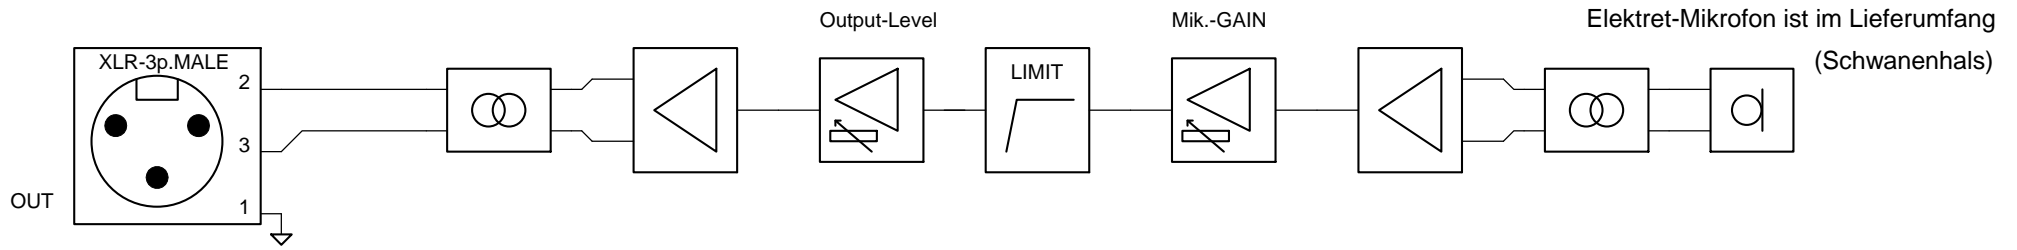

T9216C

Copyright © MMB GmbH 2013 (All Rights Reserved)
MMB GmbH reserves the right to modify this product without notice